

Select From **4** Distinctive
Yarn Face Options

With Fully **Customisable**
Modular Tiles



Ease of Cleaning - Have individual tiles cleaned at any time for tough, heavy stains.



Easy Replacement - Simply lift up damaged tiles get perfectly matched replacement tile.



Superior Colorfastness - Lab results proven color consistency over time.


Hospitality Floor
Redefined.

Available **Tile** **Sizes**

INFINITY DYE™
DIGITAL DYE INJECTION



1 Multi-Level Loop

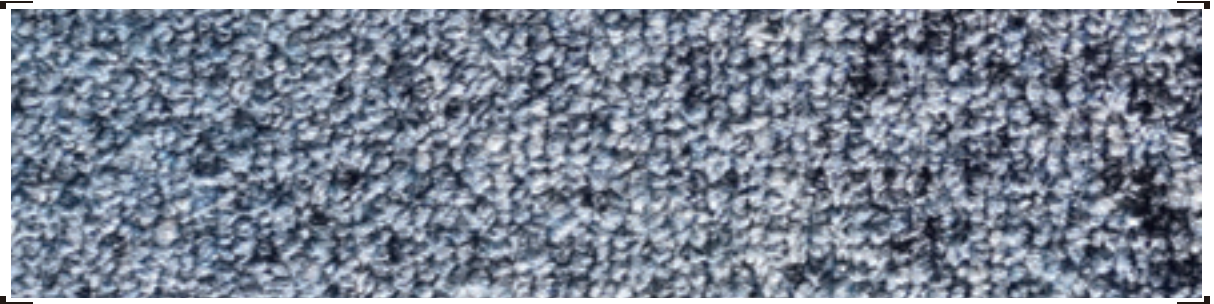


Specifications

Dye Method
Digital Dye Injection
Fiber Type
100% Newspec Certified Nylon Type 6
Pile Weight
19oz./yd(650g/m²)
Backing Type
ESC™ Cushion Back
BVT™ Hard Back
Total Thickness
ESC™ Cushion Back 9.5mm
BVT™ Hard Back 7.0mm
Flammability
B1(C-st,t0)

染色技术
数码喷射染色
表面纤维
100% 纽斯拜珂认证尼龙6
表面绒重
19oz./yd(650g/m²)
底背种类
ESC™ 弹性底
BVT™ 硬底
总厚度
ESC™ 弹性底 9.5mm
BVT™ 硬底 7.0mm
防火等级
B1(C-st,t0)

2 Textured Loop

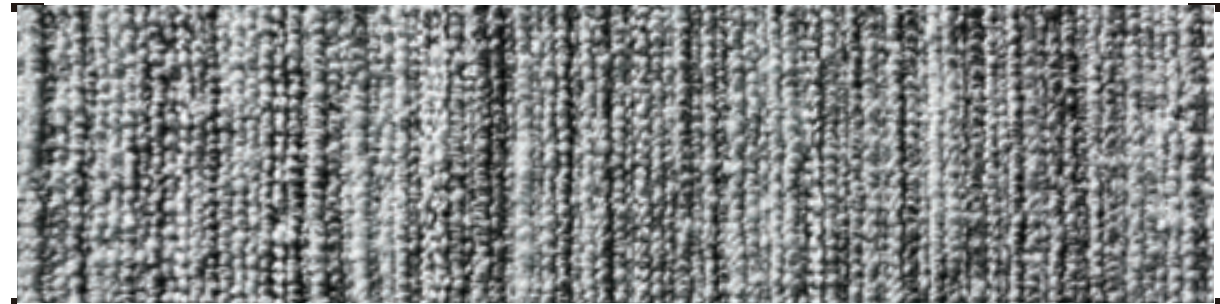


Specifications

Dye Method
Digital Dye Injection
Fiber Type
100% Newspec Certified Nylon Type 6+Type 6.6
Pile Weight
19oz./yd(650g/m²)
Backing Type
ESC™ Cushion Back
BVT™ Hard Back
Total Thickness
ESC™ Cushion Back 9.5mm
BVT™ Hard Back 7.0mm
Flammability
B1(C-st,t0)

染色技术
数码喷射染色
表面纤维
100% 纽斯拜珂认证尼龙6+6.6
表面绒重
19oz./yd(650g/m²)
底背种类
ESC™ 弹性底
BVT™ 硬底
总厚度
ESC™ 弹性底 9.5mm
BVT™ 硬底 7.0mm
防火等级
B1(C-st,t0)

3 Tip Sheared

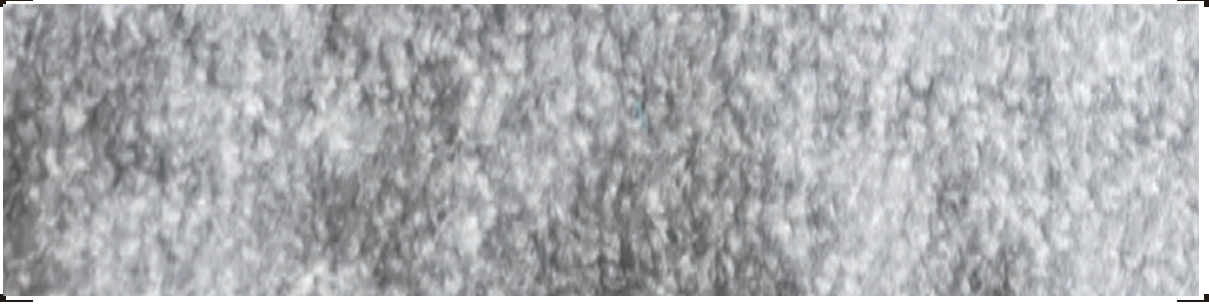


Specifications

Dye Method
Digital Dye Injection
Fiber Type
100% Newspec Certified Nylon Type 6
Pile Weight
20oz./yd(700g/m²)
Backing Type
ESC™ Cushion Back
BVT™ Hard Back
Total Thickness
ESC™ Cushion Back 9.5mm
BVT™ Hard Back 7.0mm
Flammability
B1(C-st,t0)

染色技术
数码喷射染色
表面纤维
100% 纽斯拜珂认证尼龙6
表面绒重
20oz./yd(700g/m²)
底背种类
ESC™ 弹性底
BVT™ 硬底
总厚度
ESC™ 弹性底 9.5mm
BVT™ 硬底 7.0mm
防火等级
B1(C-st,t0)

4 Cut Pile

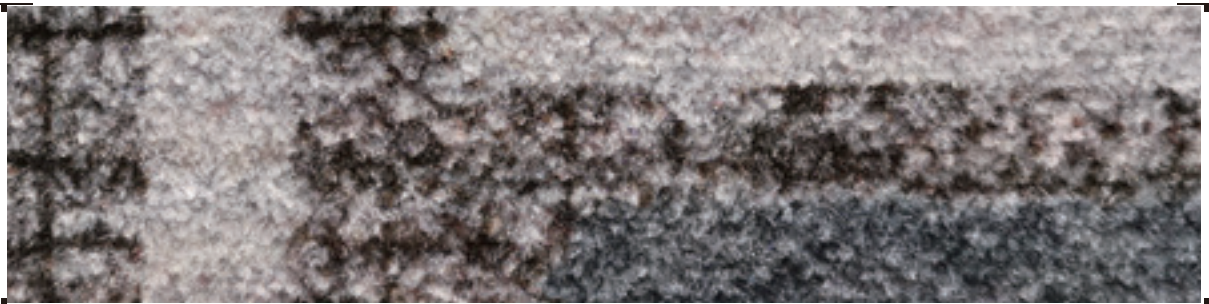

Specifications

Dye Method
Digital Dye Injection
Fiber Type
100% Newspec Certified Nylon Type 6
Pile Weight
32oz./yd(1100g/m²)
Backing Type
ESC™ Cushion Back
BVT™ Hard Back
Total Thickness
ESC™ Cushion Back 9.5mm
BVT™ Hard Back 7.0mm
Flammability
B1(C-st,t0)

染色技术
数码喷射染色
表面纤维
100% 纽斯拜珂认证尼龙6
表面绒重
32oz./yd(1100g/m²)
底背种类
ESC™ 弹性底
BVT™ 硬底
总厚度
ESC™ 弹性底 9.5mm
BVT™ 硬底 7.0mm
防火等级
B1(C-st,t0)